





# APM 800



## All Position/Mixed Service

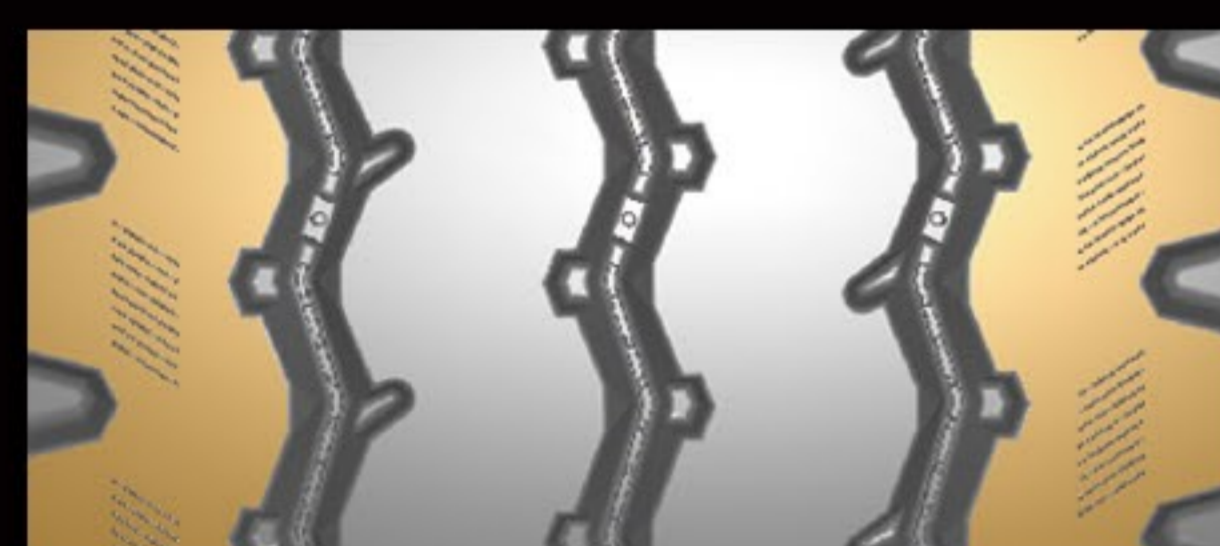

Continuous shoulder design combats tread squirm for long tread life.

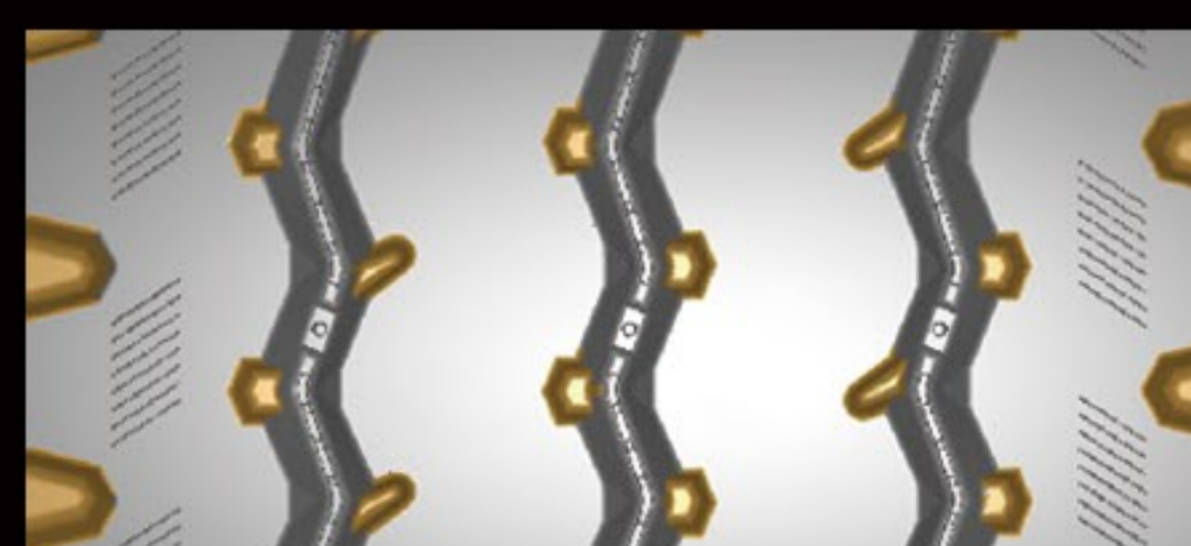

Multiple gripping angles provide biting edges that help promote wet traction.



Stone rejector platforms help protect belts from potential damage.



Tread designed with variable-pitch noise treatment to help deliver a quiet ride, and help to improve durability and traction.

Size	PR	LI/SI	Overall Dia inch	Section width inch	Tread Depth 32nd	Meas. Rim Width (in)	Max Load		Pressure psi
							Single lbs	Dual lbs	
11R22.5	16(H)	146/143N	41.5	11.0	18	8.25	6610	6005	120
11R24.5	16(H)	149/146N	43.5	11.0	18	8.25	7160	6610	120
255/70R22.5	16(H)	140/137N	36.6	10.0	18	7.50	5510	5070	120
275/70R22.5	18(J)	148/145N	37.7	10.9	18	8.25	6940	6395	130
315/80R22.5	20(L)	157/154N	42.4	12.3	20	9.00	9090	8270	130
385/65R22.5	20(L)	160M	42.2	15.3	20	11.75	9920	/	130
425/65R22.5	20(L)	165N	44.3	16.6	21	12.25	11400	/	120