




DRO 600



Drive/Regional



The new block design decreases wear by reducing the ground contact area for significantly increased mileage performance.

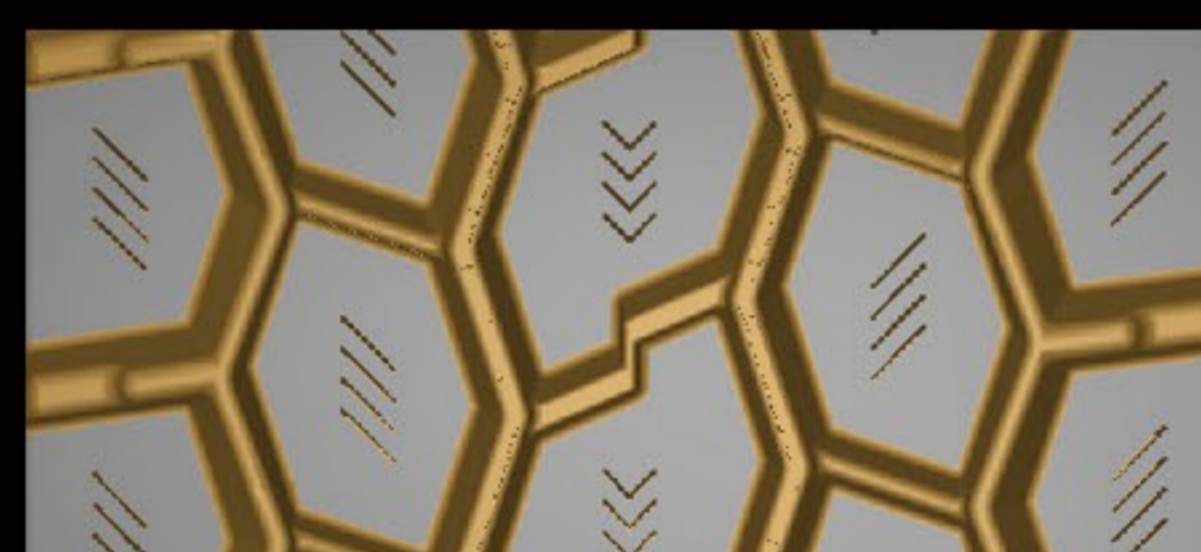

Thanks to a higher number of gripping edges, the drive axle traction is improved.



Extra wide tread and deep grooves ensure ultra-high mileage is achieved.



Open shoulder design promotes exceptional traction.

Size	PR	LI/SI	Overall Dia inch	Section width inch	Tread Depth 32nd	Meas. Rim Width (in)	Max Load		Pressure psi
							Single lbs	Dual lbs	
11R22.5	16(H)	146/143M	41.9	11.0	28	8.25	6610	6005	120
11R24.5	16(H)	149/146M	43.9	11.0	28	8.25	7160	6610	120
225/70R19.5	14(G)	128/126M	31.9	9.0	18	6.75	3970	3750	110
245/70R19.5	16(H)	135/133M	33.0	9.8	18	7.50	4805	4540	120
285/75R24.5	14(G)	144/141M	41.8	11.1	28	8.25	6175	5675	110
295/75R22.5	16(H)	146/143L	40.4	11.7	28	9.00	6610	6005	120
295/75R22.5	14(G)	144/141L	40.4	11.7	28	9.00	6175	5675	110