





# TRR 7000




## Trailer/Regional

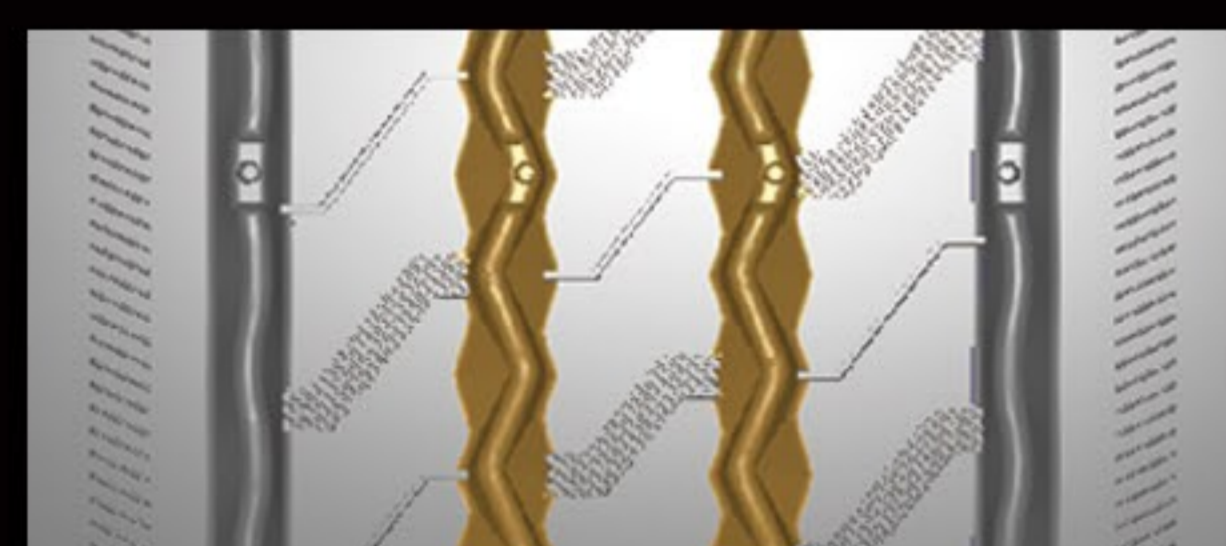


Inner grooves for an optimum against stone retention.

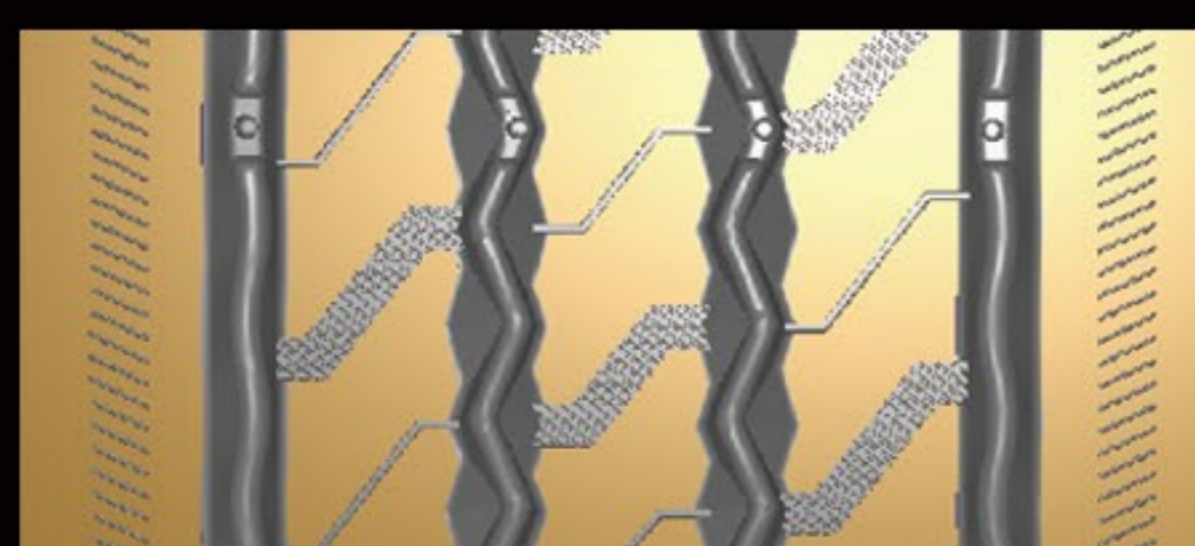

The optimized footprint is beneficial to uniform wear and prolong the service life of tire.

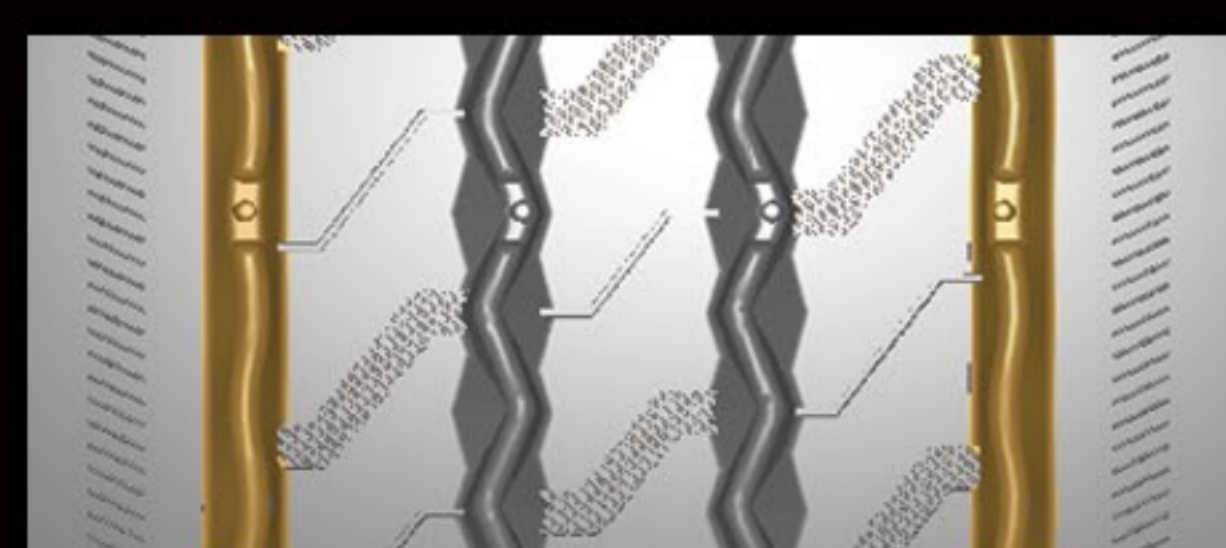

Straight groove into curve groove wave design, prevent stone, protect the casing.

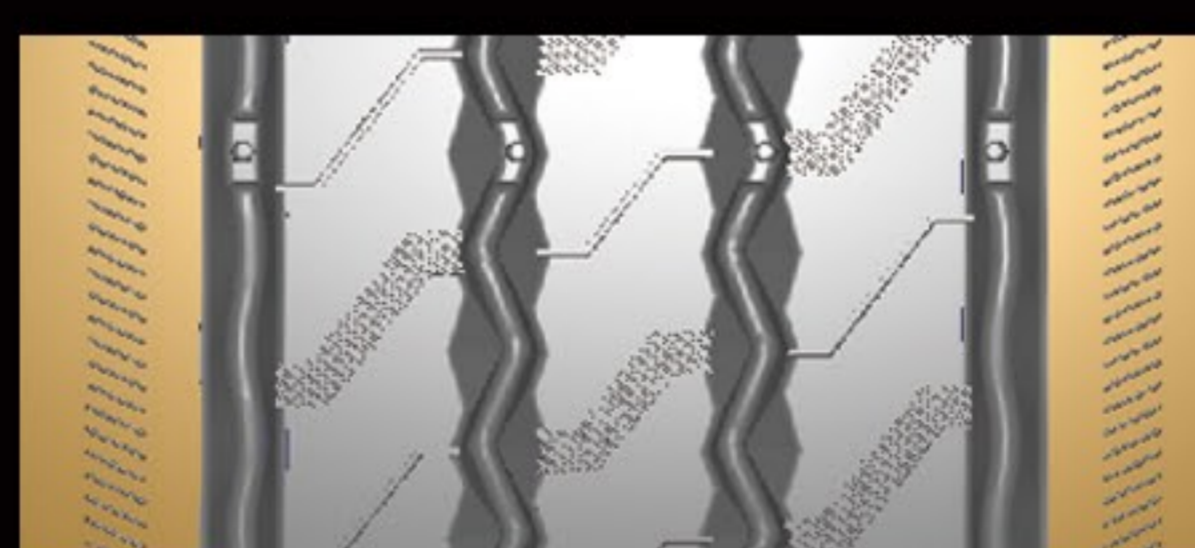

Wide and solid shoulder design improves mileage and handling.

Size	PR	LI/SI	Overall Dia inch	Section width inch	Tread Depth 32nd	Meas. Rim Width (in)	Max Load		Pressure psi
							Single lbs	Dual lbs	
11R22.5	14(G)	144/142M	41.5	11.0	13	8.25	6175	5840	105
11R24.5	14(G)	146/143M	43.5	11.0	13	8.25	6610	6005	105
285/75R24.5	14(G)	144/141M	41.3	11.1	13	8.25	6175	5675	110
295/75R22.5	14(G)	144/141L	39.9	11.7	13	9.00	6175	5675	110